
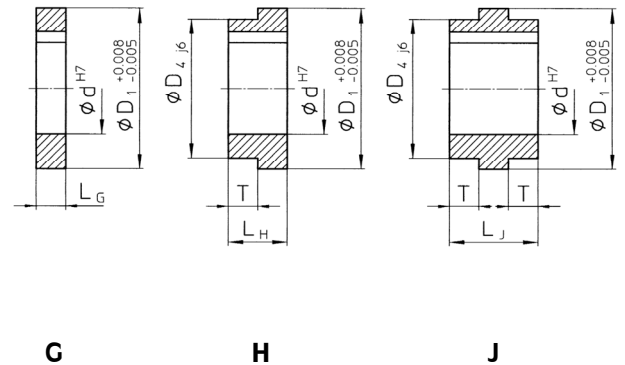


Außenringe

Innenringe

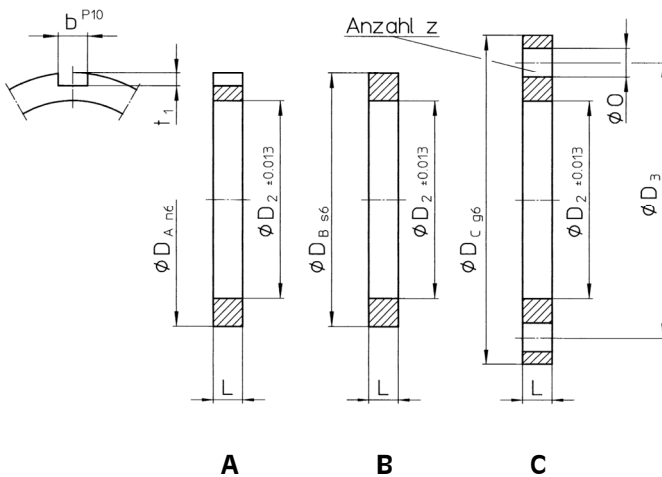

Bauart	Größe d ^{H7} [mm]	L _G [mm]	L _H [mm]	L _J [mm]	D _{4j6} [mm]	T [mm]	D ₁ ^{+0.008} _{-0.005} [mm]	L [mm]	D _{A n6} [mm]	b ^{P10} [mm]	t ₁ [mm]	D _{B s6} [mm]	D _{C g6} [mm]	D ₃ [mm]	z x D	D _{2 ±0.013} [mm]	Passende DC Bauart
DC 230A								16	72	6	3,5					54,752	DC3809A
DC 230B								16				72				54,752	
DC 230C								16					95	78	8 x 7	54,752	
DC 230G-10	10	16					38,092										
DC 230G-15	15	16					38,092										
DC 230G-20	20	16					38,092										
DC 230H-10	10		33		35	17	38,092										
DC 230H-15	15		33		35	17	38,092										
DC 230H-20	20		33		35	17	38,092										
DC 230J-10	10			50	35	17	38,092										
DC 230J-15	15			50	35	17	38,092										
DC 230J-20	20			50	35	17	38,092										
DC 167A								16	90	10	5					71,425	DC5476A DC5476A(4C)
DC 167B								16				90				71,425	
DC 167C								16					110	95	8 x 9	71,425	
DC 167G-25	25	16					54,765										
DC 167G-30	30	16					54,765										
DC 167G-35	35	16					54,765										
DC 167H-25	25		35		50	19	54,765										
DC 167H-30	30		35		50	19	54,765										
DC 167H-35	35		35		50	19	54,765										
DC 167J-25	25			54	50	19	54,765										
DC 167J-30	30			54	50	19	54,765										
DC 167J-35	35			54	50	19	54,765										
DC 168A								21	110	14	5,5					88,877	DC7221(5C) DC7221B DC7221B(5C)
DC 168B								21				110				88,877	
DC 168C								21					140	120	8 x 11	88,877	
DC 168G-40	40	21					72,217										
DC 168G-45	45	21					72,217										
DC 168G-50	50	21					72,217										
DC 168H-40	40		42		65	21	72,217										
DC 168H-45	45		42		65	21	72,217										
DC 168H-50	50		42		65	21	72,217										
DC 168J-40	40			63	65	21	72,217										
DC 168J-45	45			63	65	21	72,217										
DC 168J-50	50			63	65	21	72,217										
DC 235A								16	150	20	7,5					119,891	DC10323A(5C)
DC 235B								16				150				119,891	
DC 235C								16					190	170	8 x 11	119,891	
DC 235G-55	55	16															
DC 235G-60	60	16															
DC 235G-75	75	16															
DC 235H-55	55		43		100	27	103,231										
DC 235H-60	60		43		100	27	103,231										
DC 235H-75	75		43		100	27	103,231										
DC 235J-55	55			70	100	27	103,231										
DC 235J-60	60			70	100	27	103,231										

Bestellbeispiele : Außenring DC 168A
Innenring DC 168H-45

Paßfedernut im Innenring nach DIN 6885.1
Maß- und Konstruktionsänderungen vorbehalten